



P G V T  
S E R I E S

2023  
COLLECTION

L I V E Y O U R  
V I S I O N

600X1200MM



600x  
1200mm




# PGVT

POLISHED

To be fast and flexible, to be able to grasp opportunities in the fast-changing world, To be transparent and fair to customers, suppliers, shareholders, and employees in all our dealings.

---

# ALVINO STATUARIO

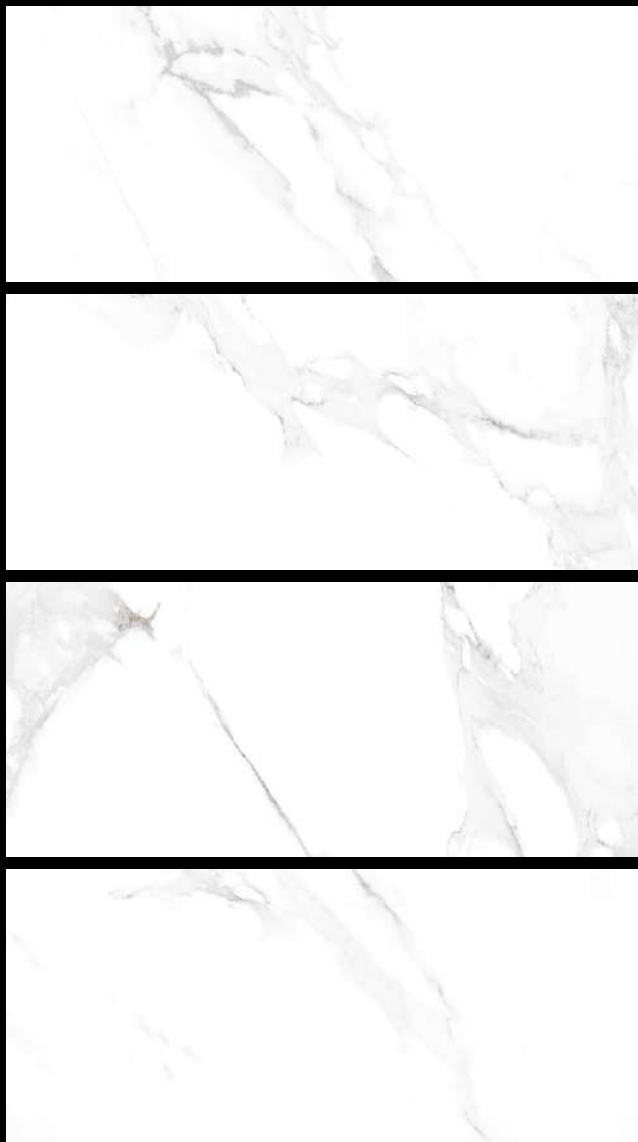

**600X  
1200MM**

POLISH  
GLAZED  
VITRIFIED  
TILES

GLOSSY  
FINISH

RANDOM DESIGN



FLOOR TILE DIGITAL DURABLE GLOSS RANDOM



# BLUE JASTO LIGHT



**600X  
1200MM**

POLISH  
GLAZED  
VITRIFIED  
TILES

GLOSSY  
FINISH

RANDOM DESIGN



**BRAIS  
WHITE**



**600X  
1200MM**


POLISH  
GLAZED  
VITRIFIED  
TILES

GLOSSY  
FINISH

RANDOM DESIGN



# CAVAVENATO FACCIA

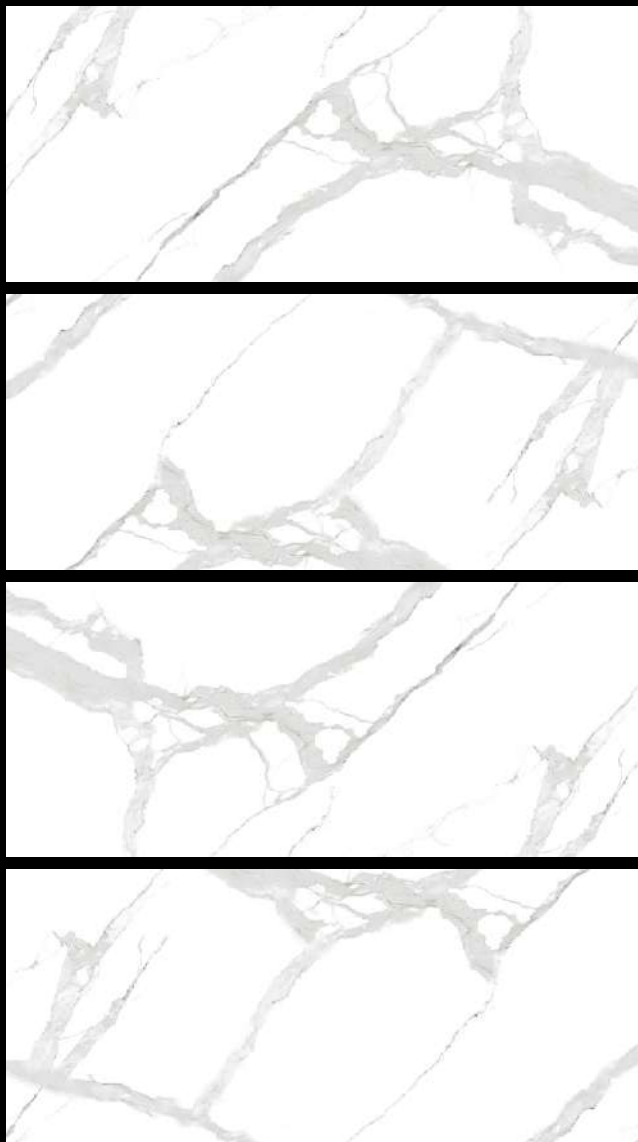

**600X  
1200MM**

POLISH  
GLAZED  
VITRIFIED  
TILES

GLOSSY  
FINISH


RANDOM DESIGN



FLOOR TILE DIGITAL DURABLE GLOSS RANDOM



**CONICA  
WHITE**

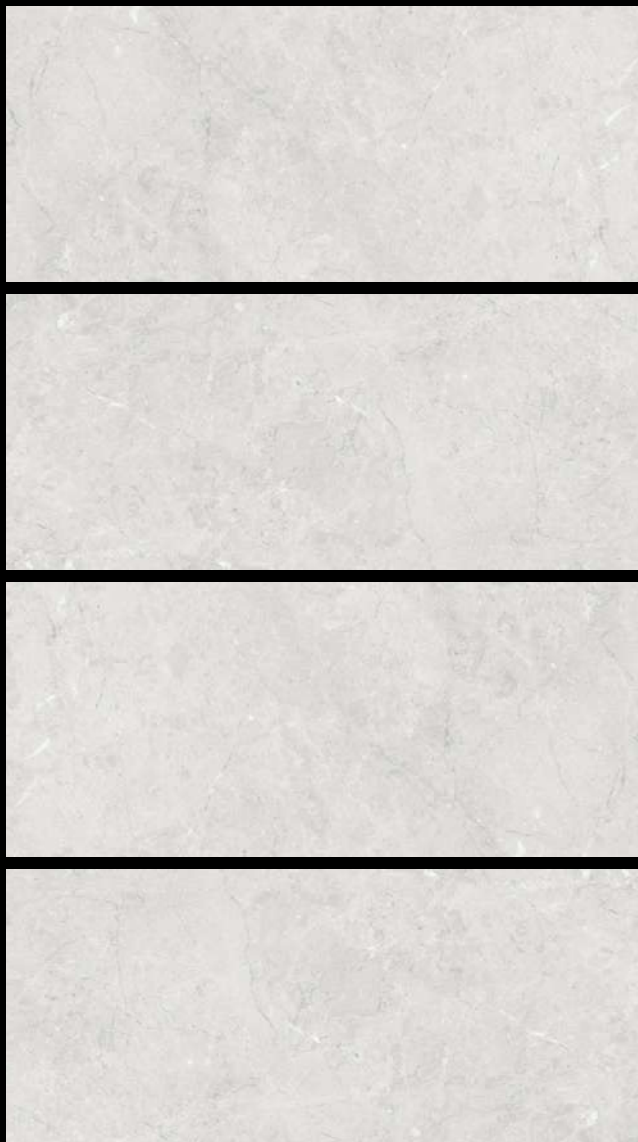

**600X  
1200MM**


POLISH  
GLAZED  
VITRIFIED  
TILES

GLOSSY  
FINISH

RANDOM DESIGN



# DAMASCATAS BIANCO

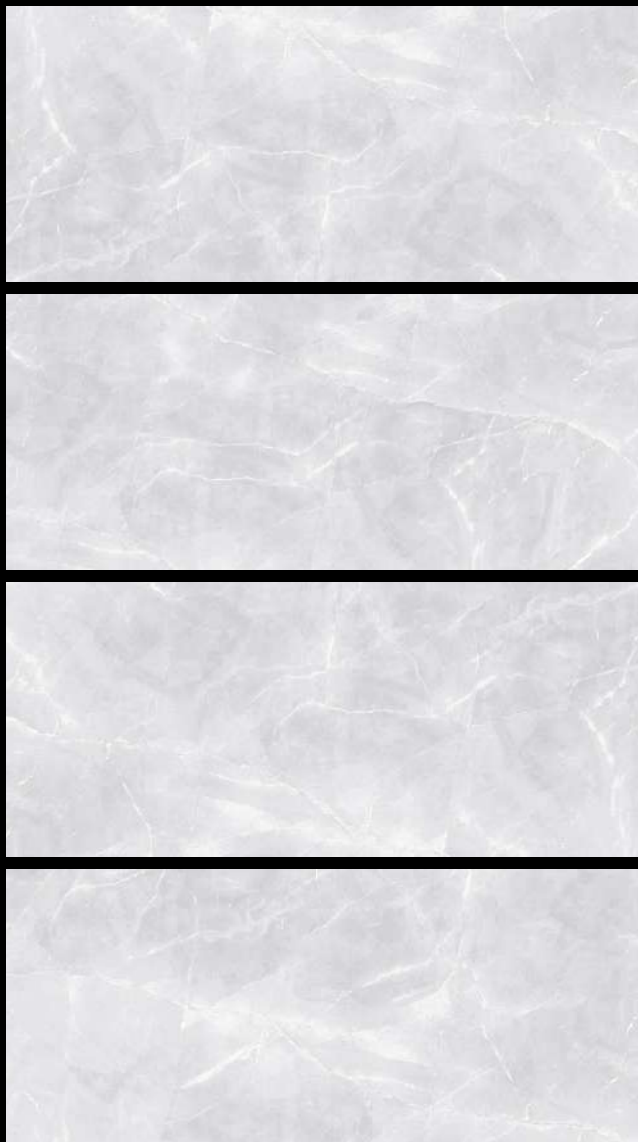

**600X  
1200MM**


POLISH  
GLAZED  
VITRIFIED  
TILES

GLOSSY  
FINISH

RANDOM DESIGN



**LEVIN  
WHITE**

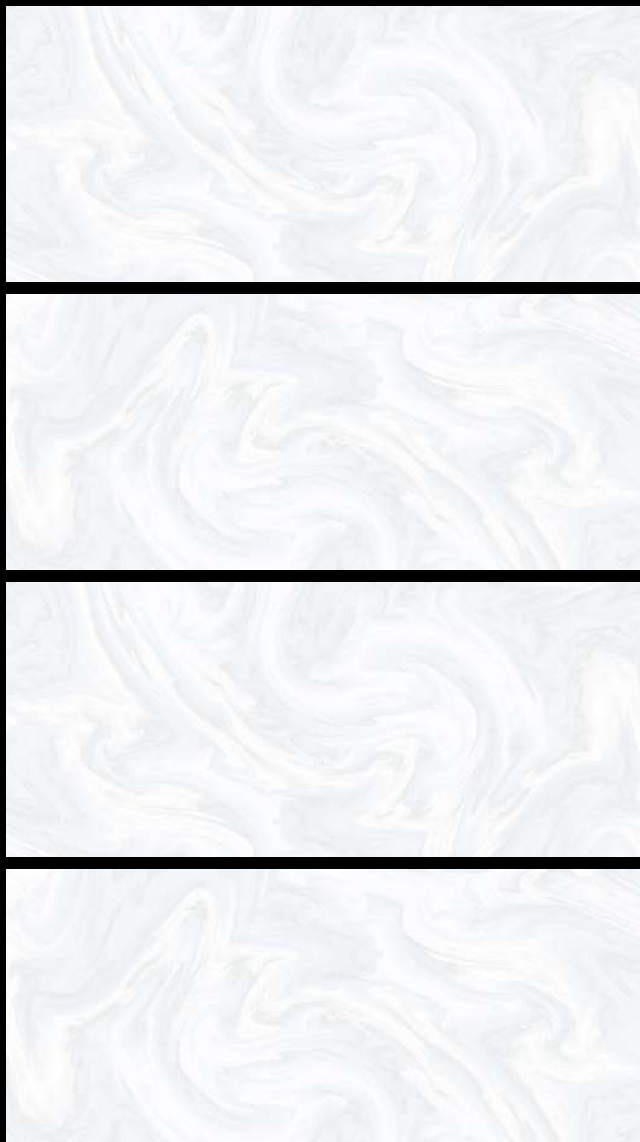

**600X  
1200MM**


POLISH  
GLAZED  
VITRIFIED  
TILES

GLOSSY  
FINISH

RANDOM DESIGN



# MIAMI BIANCO

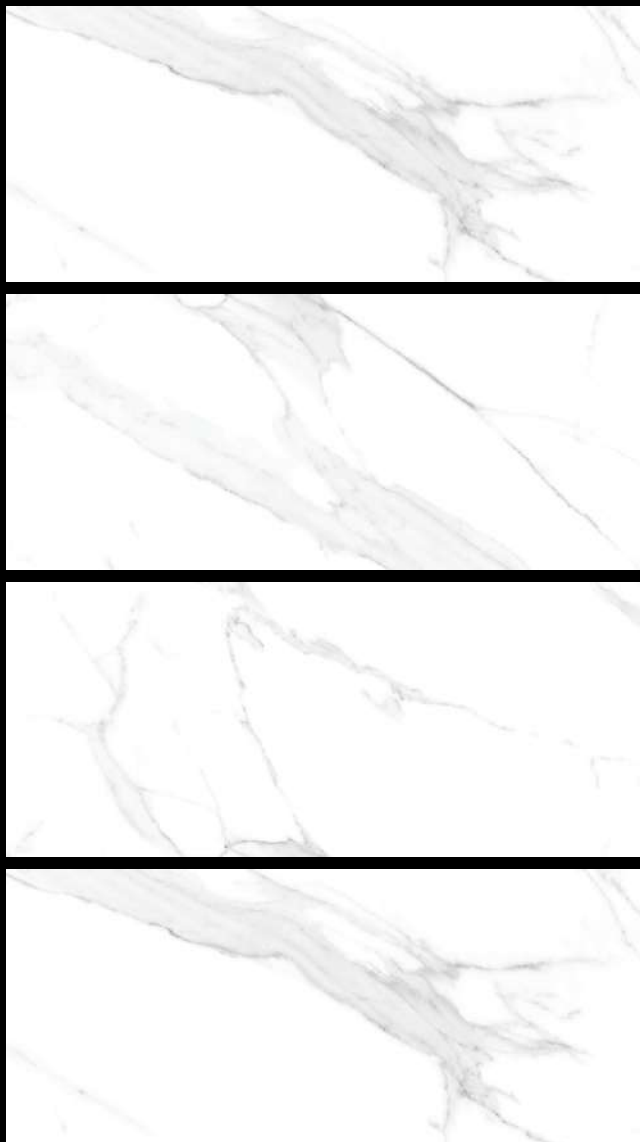

**600X  
1200MM**

POLISH  
GLAZED  
VITRIFIED  
TILES

GLOSSY  
FINISH

RANDOM DESIGN





# MIAMI NATURAL



**600X  
1200MM**

POLISH  
GLAZED  
VITRIFIED  
TILES

GLOSSY  
FINISH

RANDOM DESIGN



FLOOR TILE DIGITAL DURABLE GLOSS RANDOM



# RIVER BLUE



**600X  
1200MM**

POLISH  
GLAZED  
VITRIFIED  
TILES

GLOSSY  
FINISH

RANDOM DESIGN



FLOOR TILE DIGITAL DURABLE GLOSS RANDOM



# SCAMBIO WHITE



**600X  
1200MM**

POLISH  
GLAZED  
VITRIFIED  
TILES

GLOSSY  
FINISH

RANDOM DESIGN



FLOOR TILE



DIGITAL

DURABLE

GLOSS

RANDOM

# WHITE FLURRY

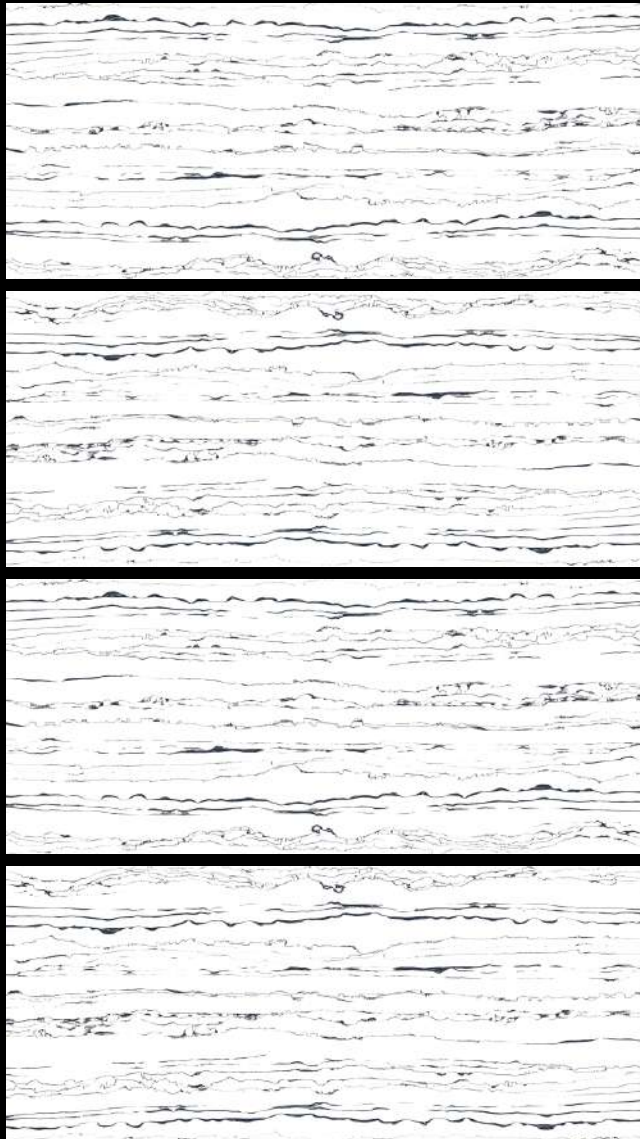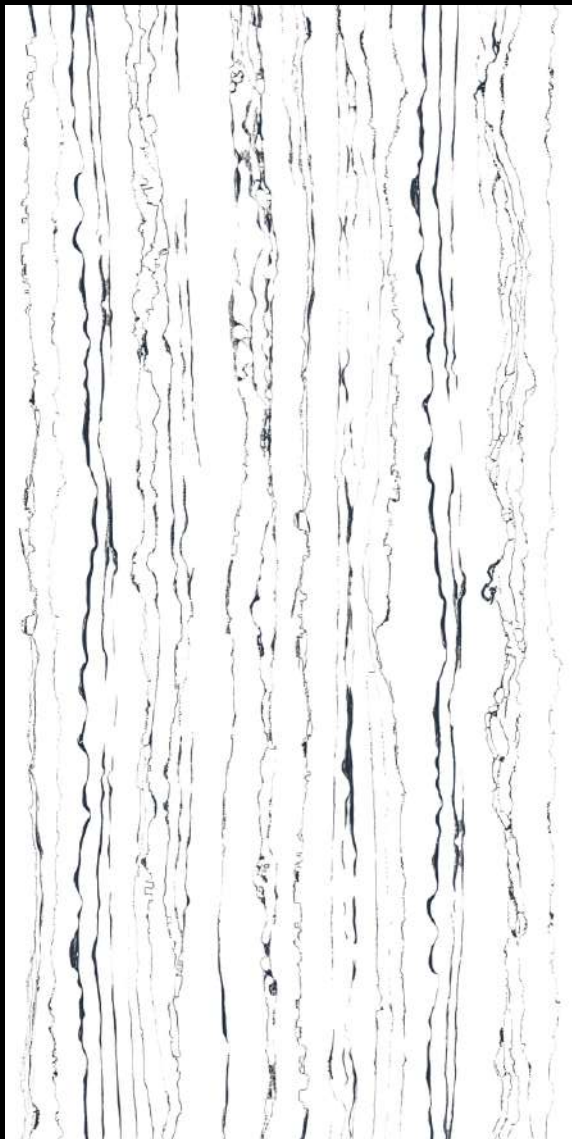

**600X  
1200MM**

POLISH  
GLAZED  
VITRIFIED  
TILES

GLOSSY  
FINISH

RANDOM DESIGN



FLOOR TILE



DIGITAL



DURABLE




GLOSS



RANDOM

**SUPER  
WHITE**



**600X  
1200MM**

POLISH  
GLAZED  
VITRIFIED  
TILES

GRANITO

GLOSSY  
FINISH

RANDOM DESIGN




FLOOR TILE DIGITAL DURABLE GLOSS RANDOM



THE SPHERE OF  
*Ingenuity*

POLISH GLAZED VITRIFIED  
**600X1200MM**

# CREMA MARFIL

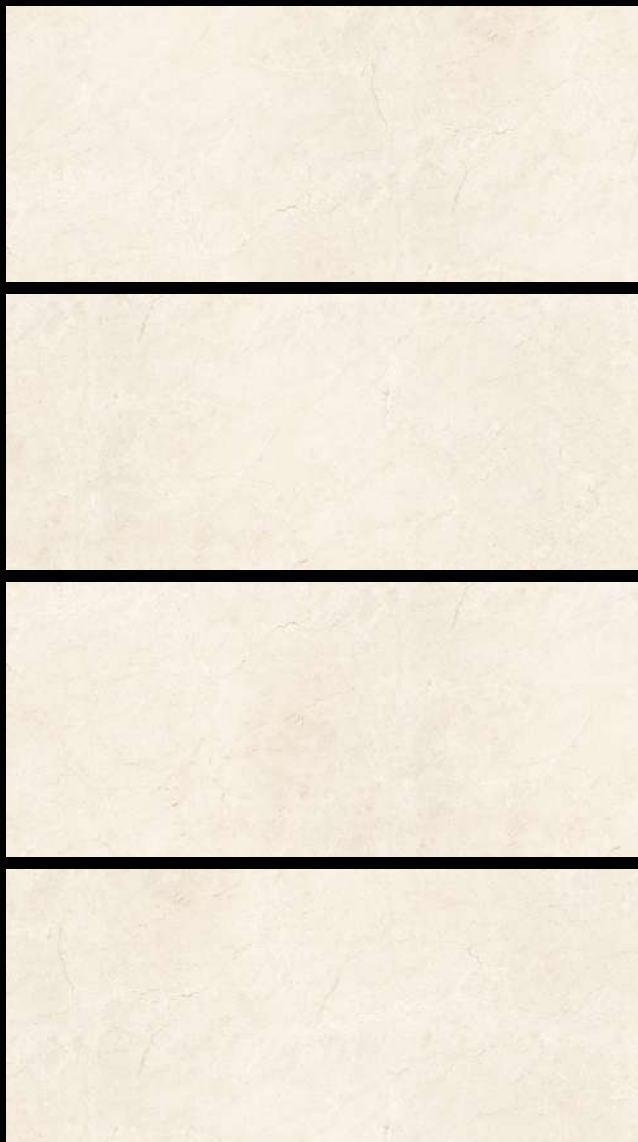

**600X  
1200MM**

POLISH  
GLAZED  
VITRIFIED  
TILES

GRANITO

GLOSSY  
FINISH

RANDOM DESIGN





**DYNA**  
**BEIGE SN**



**600X**  
**1200MM**

POLISH  
GLAZED  
VITRIFIED  
TILES


GLOSSY  
FINISH

RANDOM DESIGN





**ITALIA  
BEIGE**

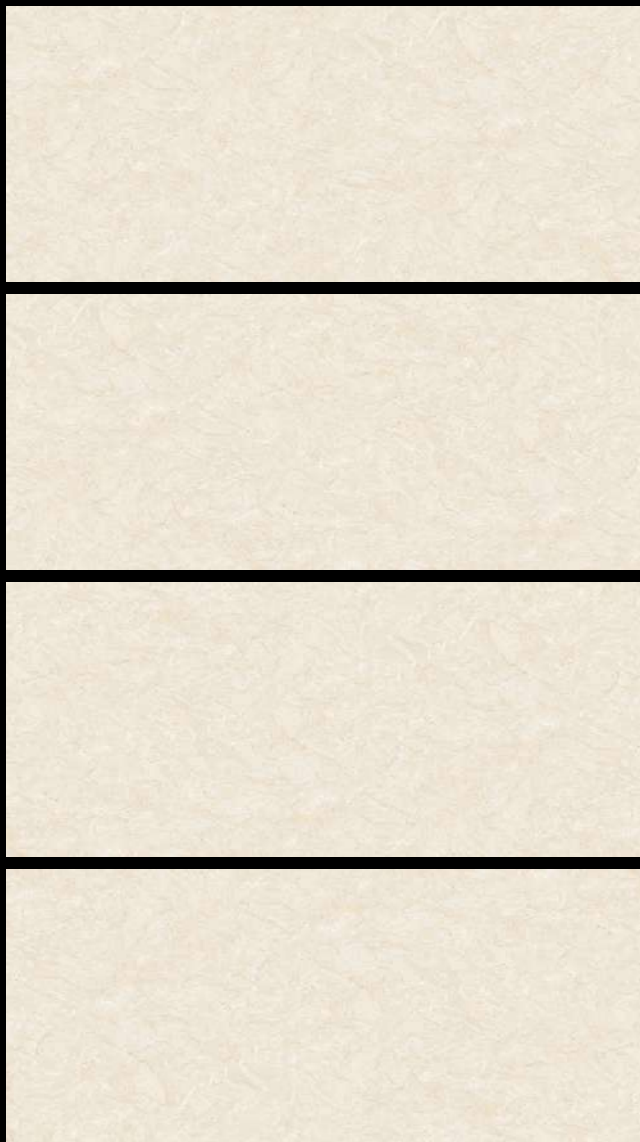

**600X  
1200MM**

POLISH  
GLAZED  
VITRIFIED  
TILES

GLOSSY  
FINISH

RANDOM DESIGN





**LEVIN  
IVORY**



**600X  
1200MM**

POLISH  
GLAZED  
VITRIFIED  
TILES

GLOSSY  
FINISH

RANDOM DESIGN



# RIVER BROWN



**600X  
1200MM**

POLISH  
GLAZED  
VITRIFIED  
TILES

GLOSSY  
FINISH

RANDOM DESIGN



FLOOR TILE DIGITAL DURABLE GLOSS RANDOM



# SCAMBIO IVORY



**600X  
1200MM**

POLISH  
GLAZED  
VITRIFIED  
TILES

GLOSSY  
FINISH

RANDOM DESIGN



# TRAVENTINO BRASS LIGHT



**600X  
1200MM**

POLISH  
GLAZED  
VITRIFIED  
TILES

GLOSSY  
FINISH  
RANDOM DESIGN



FLOOR TILE DIGITAL DURABLE GLOSS RANDOM



TECHNICAL  
SPECIFICATION

| TEST DESCRIPTION                        | TEST METHOD        | ISO STANDARD 13006 B1a TILES         | VALUE                                |
|-----------------------------------------|--------------------|--------------------------------------|--------------------------------------|
| Length and Width                        | BS EN ISO 10545-2  | ±0.6%                                | ±0.3%                                |
| Thickness                               | BS EN ISO 10545-2  | ±5.0%                                | ±3.0%                                |
| Straightness of Sides                   | BS EN ISO 10545-2  | ±0.5%                                | ±0.3%                                |
| Rectangularity                          | BS EN ISO 10545-2  | ±0.6%                                | ±0.3%                                |
| Surface Flatness                        | BS EN ISO 10545-2  | ±0.5%                                | ±0.3%                                |
| Water Absorption                        | BS EN ISO 10545-3  | ≤0.5%                                | ≤0.05%                               |
| Breaking Strength                       | BS EN ISO 10545-4  | ≥1300N                               | ≥1500N                               |
| Modulus of Repture                      | BS EN ISO 10545-4  | ≥35N/mm <sup>2</sup>                 | ≥45N/mm <sup>2</sup>                 |
| Resistance to Deep Abrasion             | BS EN ISO 10545-6  | ≤175mm <sup>3</sup>                  | ≤150mm <sup>3</sup>                  |
| Linear Thermal Expansion                | BS EN ISO 10545-8  | ≤9X10 <sup>-6</sup> °C <sup>-1</sup> | ≤7X10 <sup>-6</sup> °C <sup>-1</sup> |
| Thermal Shock Resistance                | BS EN ISO 10545-9  | No Visible Defect                    | No Visible Defect                    |
| Frost Resistance                        | BS EN ISO 10545-12 | Frost Proof                          | Frost Proof                          |
| Resistance to Chemicals                 | BS EN ISO 10545-13 | No Visible Effect                    | No Visible Effect                    |
| Resistance to Stains                    | BS EN ISO 10545-14 | Manufacturer to State Class          | Stains Removed Min. Class 2          |
| Colour Resistance                       | BS EN ISO 10545-16 | No Damage                            | No Damage                            |
| Colour Resistance to UV Light           | DIN 51094          | No Change in Color                   | No Change in Color                   |
| Scratch Hardness(MOH's Scale)           | EN 101             | ≥6 MOH's                             | ≥7 MOH's                             |
| Surface Quality                         | BS EN 10545-2      | Min. 95%                             | No Visible Defect                    |
| Skid Resistance (Friction co-efficient) | BS EN 10545-17     | >0.4                                 | >0.4                                 |
| Moisture Expansion                      | —                  | Nil                                  | Nil                                  |

PACKING DETAILS

| DIMENSION     | PIECES | COVERAGE      |
|---------------|--------|---------------|
| 600 X 1200 MM | 2      | 1.44 sq. mtr. |

**DISCLAIMER :** We tiles reserve the right to deleted and amend either totally or partially, any of the colors, shape, sizes, references and other technical specification contained in this catalogue at anytime. The colors shown of tiles in this catalogue are purely illustrative and limited to printing process. Please refer actual sample before final selection. The details of sizes, colors, references should be verified for typographical errors.



SOUTHINDIATILES

159/1,159/2, Bashyakaralu Road East, R.S.Puram,  
Coimbatore,Tamilnadu-641002

E-mail: [info@southindiatiles.com](mailto:info@southindiatiles.com) | [www.southindiatiles.com](http://www.southindiatiles.com)

Number :+91 7066666618