



metallic

S E R I E S

2023
COLLECTION

LIVE YOUR
VISION

600X1200MM

WHEN
BEAUTY
IS
TANGIBLE

metallic

04 —

SHADES AND SIZES



GLAZED

VETRIFIED TILES

BROWN
GOLD
BLACK
WHITE
IVORY
HAZEL
GREY
AZUL
STEEL
NATURAL



600 x 1200 mm

09 mm



metallic

05 —

TECHNICAL CHARACTERISTICS



Waterproof
Surface



Respectful of
the Environment



Wear
Resistance



Resistance to
Fire and Heat



Chemical
Resistance



Impact
Resistance



Lightweight



Frost
Resistance




Hygienic
Surface



Flexural
Strength



METALLIC - 105 WHITE

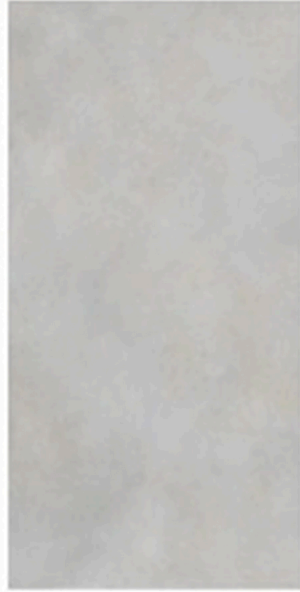

METALLIC - 105 GREY



metallic





METALLIC - 105 - WHITE-GREY - 600 x 1200 MM



METALLIC - 106 IVORY



METALLIC - 106 BROWN

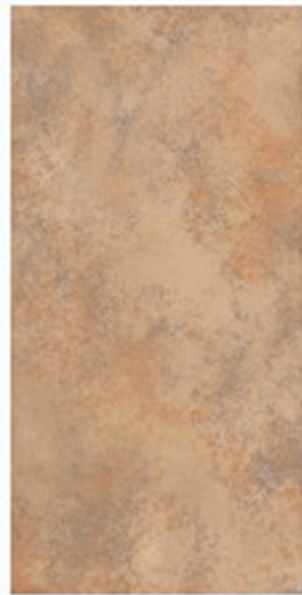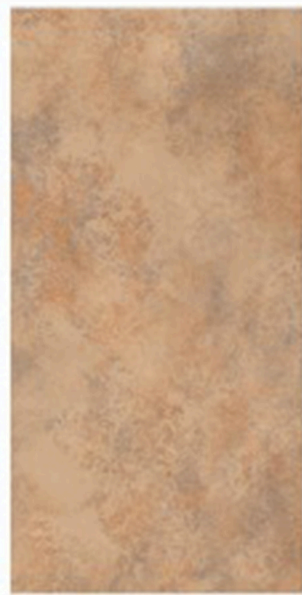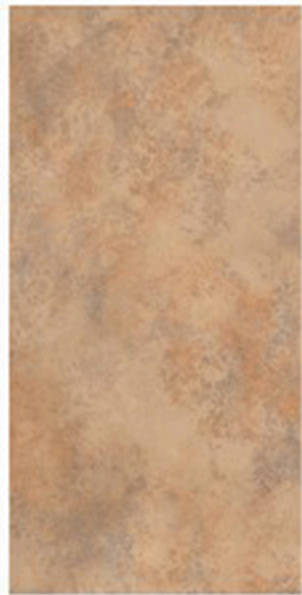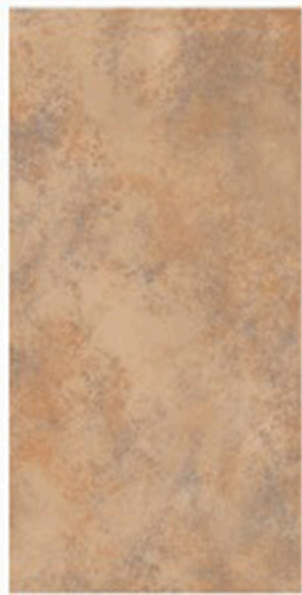

metallic

METALLIC - 106 - IVORY-BROWN - 600 x 1200 MM



METALLIC - 113 WHITE



METALLIC - 113 AZUL




metallic

METALLIC - 113 - WHITE-AZUL - 600 x 1200 MM



METALLIC - 113 IVORY

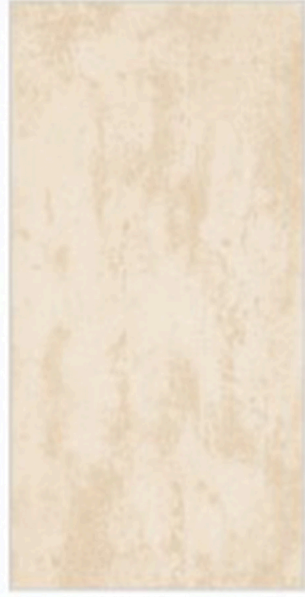

METALLIC - 113 BROWN



metallic




METALLIC - 113 - IOVRY-BROWN - 600 x 1200 MM



METALLIC - 113 WHITE



METALLIC - 113 BLACK

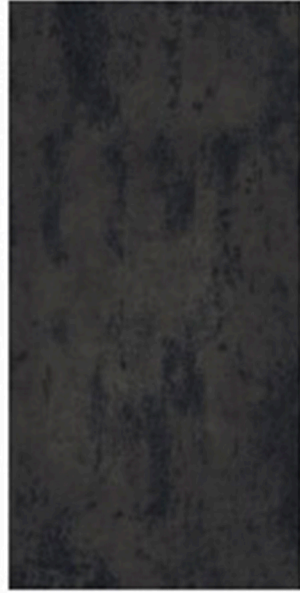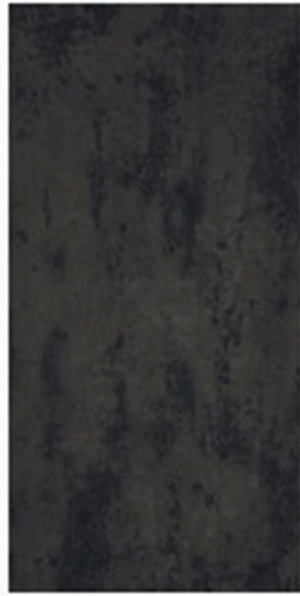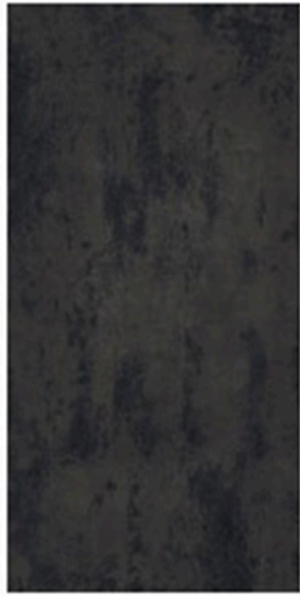

easy to clean



fire proof




frost proof

metallic


METALLIC - 113 - WHITE-BLACK - 600 x 1200 MM



METALLIC - 116 WHITE

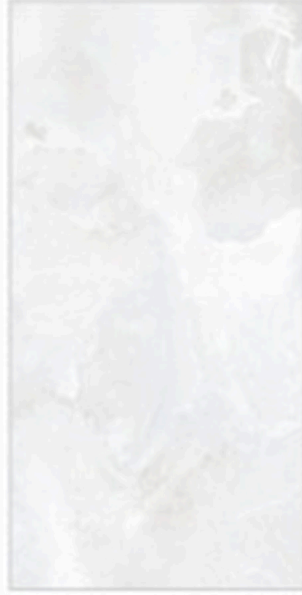

METALLIC - 116 TEAL

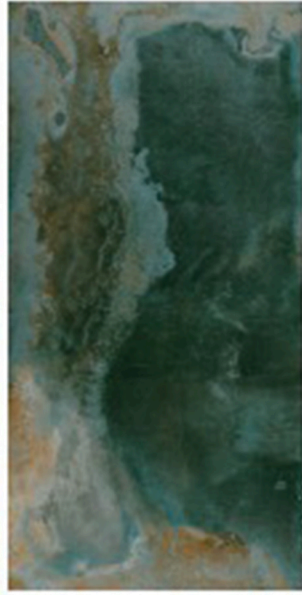


metallic



METALLIC - 116 - TEAL-WHITE - 600 x 1200 MM



METALLIC - 116 WHITE

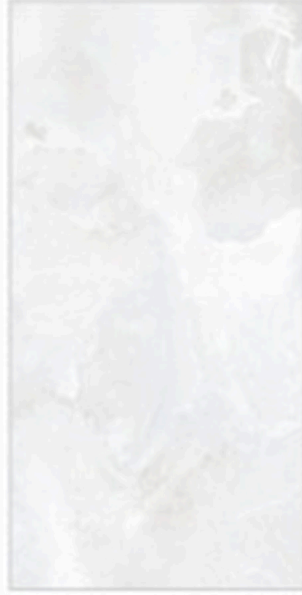

METALLIC - 116 NATURAL

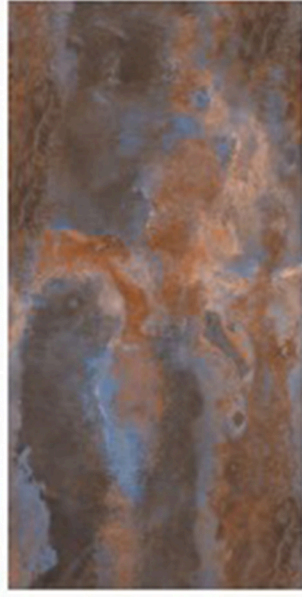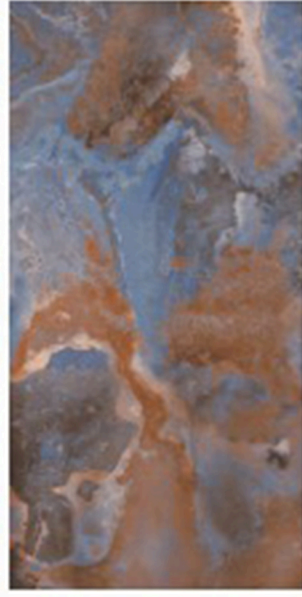

metallic

METALLIC - 116 - NATURAL-WHITE - 600 x 1200 MM



TECHNICAL SPECIFICATION

TEST DESCRIPTION	TEST METHOD	ISO STANDARD 13006 B1a TILES	VALUE
Length and Width	BS EN ISO 10545-2	±0.6%	±0.3%
Thickness	BS EN ISO 10545-2	±5.0%	±3.0%
Straightness of Sides	BS EN ISO 10545-2	±0.5%	±0.3%
Rectangularity	BS EN ISO 10545-2	±0.6%	±0.3%
Surface Flatness	BS EN ISO 10545-2	±0.5%	±0.3%
Water Absorption	BS EN ISO 10545-3	≤0.5%	≤0.05%
Breaking Strength	BS EN ISO 10545-4	≥1300N	≥1500N
Modulus of Repture	BS EN ISO 10545-4	≥35N/mm²	≥45N/mm²
Resistance to Deep Abrasion	BS EN ISO 10545-6	≤175mm³	≤150mm³
Linear Thermal Expansion	BS EN ISO 10545-8	≤9X10 ⁻⁶ °C ⁻¹	≤7X10 ⁻⁶ °C ⁻¹
Thermal Shock Resistance	BS EN ISO 10545-9	No Visible Defect	No Visible Defect
Frost Resistance	BS EN ISO 10545-12	Frost Proof	Frost Proof
Resistance to Chemicals	BS EN ISO 10545-13	No Visible Effect	No Visible Effect
Resistance to Stains	BS EN ISO 10545-14	Manufacturer to State Class	Stains Removed Min. Class 2
Colour Resistance	BS EN ISO 10545-16	No Damage	No Damage
Colour Resistance to UV Light	DIN 51094	No Change in Color	No Change in Color
Scratch Hardness(MOH's Scale)	EN 101	≥6 MOH's	≥7 MOH's
Surface Quality	BS EN 10545-2	Min. 95%	No Visible Defect
Skid Resistance (Friction co-efficient)	BS EN 10545-17	>0.4	>0.4
Moisture Expansion	—	Nil	Nil

PACKING DETAILS

DIMENSION	PIECES	COVERAGE
600 X 1200 MM	2	15.5 sq. ft

DISCLAIMER : We tiles reserve the right to deleted and amend either totally or partially, any of the colors, shape, sizes, references and other technical specification contained in this catalogue at anytime. The colors shown of tiles in this catalogue are purely illustrative and limited to printing process. Please refer actual sample before final selection. The details of sizes, colors, references should be verified for typographical errors.



SOUTHINDIA**TILES**

159/1,159/2, Bashyakaralu Road East, R.S.Puram,
Coimbatore,Tamilnadu-641002

E-mail: info@southindiatiles.com | www.southindiatiles.com

Number :+91 7066666618